PremFast Ltd

Steel Blind Rivet Nuts
Reduced Csk Head Knurled Body-Metric Hole

Thread Size	Grip Range	Hole Dia	Body Dia	Head Dia	Head Thickness	Overall Length
M3	0.5/2.0	5.0	4.9	6.0	0.5	9.0
M4	0.5/2.0	6.0	5.9	7.0	0.5	11.3
M4	2.0/4.0	6.0	5.9	7.0	0.5	13.0
M5	0.5/3.0	7.0	6.9	8.0	0.5	12.0
M5	2.0/4.0	7.0	6.9	8.0	0.5	13.0
M6	0.5/3.0	9.0	8.9	10.0	0.6	14.0
M6	2.5/4.5	9.0	8.9	10.0	0.6	16.0
M8	0.5/3.8	11.0	10.9	12.0	0.6	17.3
M8	3.0/5.0	11.0	10.9	12.0	0.6	18.5
M10	0.7/3.5	12.0	11.9	13.0	0.7	19.5
M10	0.7/3.5	13.1	12.9	14.0	0.8	21.0
M10	3.5/6.0	13.1	12.9	14.0	0.8	23.5
M12	1.0/3.5	16.1	15.9	17.0	1.0	24.2

⇒ STEEL ZINC Cr3

Tel: 01202 747217
sales@premfast.co.uk

PremFast Ltd

Steel Blind Rivet Nuts
Reduced Csk Head Half Hex Body-Metric Hole

Thread Size	Grip Range	Hole Size A/F	Body Dia	Head Dia	Head Thickness	Overall Length
M3	0.5/1.5	5.1	4.9	6.0	0.5	9.3
M3	1.5/2.5	5.1	4.9	6.0	0.5	10.0
M4	0.5/2.0	6.1	5.9	7.0	0.5	12.0
M5	0.5/3.0	7.1	6.9	8.0	0.5	13.0
M6	0.5/3.0	9.1	8.9	10.0	0.6	16.0
M8	0.7/3.0	11.1	10.9	12.0	0.6	16.5
M10	0.8/3.5	13.1	13.0	14.0	0.8	20.0

⇒ STEEL ZINC Cr3

Tel: 01202 747217

sales@premfast.co.uk

PremFast Ltd

Steel Blind Rivet Nuts
Reduced Csk Head Full Hex Body

Thread Size	Grip Range	Hole Size A/F	Body Dia	Head Dia	Head Thickness	Overall Length
M4	0.5/2.5	6.1	6.0	7.0	0.5	11.0
M4	2.0/4.0	6.1	6.0	7.0	0.5	12.2
M5	0.5/3.0	7.1	7.0	8.0	0.5	14.5
M5	2.0/4.5	7.1	7.0	8.0	0.6	15.0
M6	0.6/3.5	7.0	6.9	8.0	0.5	13.0
M6	0.5/3.0	9.1	9.0	10.0	0.6	16.0
M6	3.0/5.5	9.1	9.0	10.0	0.6	18.0
M8	0.7/4.0	11.1	11.0	12.0	0.6	18.0
M8	3.0/5.5	11.1	11.0	12.0	0.6	19.0
M10	1.0/3.5	13.1	13.0	14.5	1.0	20.0
M10	3.0/6.0	13.1	12.9	14.0	0.8	25.0
M12	1.0/4.0	16.1	16.0	17.5	1.0	25.0

⇒ STEEL ZINC Cr3

Tel: 01202 747217
sales@premfast.co.uk

PremFast Ltd

Steel Blind Rivet Nuts
Flange Head Knurled Body M3 - M8

Thread Size	Grip Range	Hole Dia	Body Dia	Head Dia	Head Thickness	Overall Length
M3	0.5/2.0	5.0	4.9	8.0	0.8	10.0
M3	2.5/4.0	5.0	4.9	7.0	0.9	11.5
M4	0.5/2.5	6.0	5.9	9.0	1.0	11.6
M4	3.0/5.5	6.0	5.9	9.0	1.0	14.0
M5	0.5/2.5	7.0	6.9	10.0	1.0	13.0
M5	3.0/5.5	7.0	6.9	10.0	1.0	16.0
M5	5.5/8.0	7.0	6.9	10.0	1.0	19.0
M6	0.5/3.0	9.0	8.9	12.5	1.5	16.0
M6	3.0/5.5	9.0	8.9	12.3	1.3	19.5
M6	5.5/8.0	9.0	8.9	12.3	1.5	21.0
M8	0.7/3.0	11.0	10.9	16.0	1.5	18.5
M8	3.0/5.5	11.0	10.9	16.0	1.5	21.0
M8	8.0/10.5	11.0	10.9	15.0	1.6	25.0

SCROLL TO NEXT PAGE FOR M10 & M12

⇒ STEEL ZINC Cr3

Tel: 01202 747217
sales@premfast.co.uk

PremFast Ltd

Steel Blind Rivet Nuts
Flange Head Knurled Body M10 - M12

Thread Size	Grip Range	Hole Dia	Body Dia	Head Dia	Head Thickness	Overall Length
M10	1.0/3.5	12.0	11.9	16.0	2.0	19.0
M10	3.0/6.0	12.0	11.9	16.0	2.0	24.0
M10	6.0/9.0	12.0	11.9	16.0	2.0	27.0
M10	9.0/12.0	12.0	11.9	16.0	2.0	30.0
M10	1.0/3.5	13.0	12.9	19.0	2.0	21.0
M10	3.5/6.0	13.0	12.9	19.0	2.0	23.5
M12	1.0/4.0	16.0	15.9	22.0	2.1	25.0
M12	4.0/7.0	16.0	15.9	22.0	2.1	28.0
M12	7.0/10	16.0	15.9	22.0	2.1	31.0

⇒ STEEL ZINC Cr3

Tel: 01202 747217
sales@premfast.co.uk

PremFast Ltd

Steel Blind Rivet Nuts
Csk Head Knurled Body

Thread Size	Grip Range	Hole Dia	Body Dia	Head Dia	Head Thickness	Overall Length
M3	1.5/3.5	5.0	4.9	7.5	1.5	11.5
M3	3.5/5.0	5.0	4.9	7.5	1.5	12.5
M4	1.5/3.5	6.0	5.9	8.5	1.5	12.0
M4	3.5/6.5	6.0	5.9	8.5	1.5	15.0
M5	1.5/4.0	7.0	6.9	9.5	1.5	13.0
M5	4.0/6.5	7.0	6.9	9.5	1.5	16.0
M5	6.5/9.0	7.0	6.9	9.5	1.5	18.5
M6	1.5/4.0	9.0	8.9	11.5	1.5	15.5
M6	4.0/6.5	9.0	8.9	11.5	1.5	18.0
M6	6.5/9.0	9.0	8.9	11.5	1.5	20.5
M8	1.7/4.5	11.0	10.9	13.5	1.5	18.5
M8	4.0/6.5	11.0	10.9	13.5	1.5	21.0
M8	6.5/9.0	11.0	10.9	13.5	1.5	23.5

⇒ STEEL ZINC Cr3

SCROLL DOWN TO NEXT PAGE FOR M10/M12

Tel: 01202 747217
sales@premfast.co.uk

PremFast Ltd

Steel Blind Rivet Nuts
Csk Head Knurled Body

Thread Size	Grip Range	Hole Dia	Body Dia	Head Dia	Head Thickness	Overall Length
M10	2.0/4.5	12.0	11.9	14.5	1.7	21.0
M10	4.5/7.5	12.0	11.9	14.5	1.7	24.0
M10	7.5/10.5	12.0	11.9	14.5	1.7	27.0
M12	2.0/4.5	16.0	15.9	19.0	1.9	24.5
M12	4.5-7.5	16.0	15.9	19.0	1.9	27.5
M12	7.5/10.5	16.0	15.9	19.0	1.9	31.0

⇒ STEEL ZINC Cr3

Tel: 01202 747217
sales@premfast.co.uk

PremFast Ltd

A2 Stainless Steel
Reduced Csk Knurled Body Blind Rivet Nuts

Thread Size	Grip Range	Hole Dia	Body Dia	Head Dia	Head Thickness	Overall Length
M3	0.5/2.0	5.0	4.9	6.0	0.5	9.0
M4	0.5/2.5	6.0	5.9	7.0	0.5	11.0
M4	2.5/4.0	6.0	5.9	7.0	0.5	12.5
M5	0.5/3.0	7.0	6.9	8.0	0.5	12.0
M5	3.0/4.5	7.0	6.9	8.0	0.5	13.5
M6	0.5/3.0	9.0	8.9	10.0	0.5	14.0
M6	3.0/5.0	9.0	8.9	10.	0.5	16.0
M8	0.7/3.0	11.0	10.9	12.0	0.5	16.0
M8	3.5/5.5	11.0	10.9	12.0	0.5	18.5
M10	1.0/3.5	13.0	12.9	14.2	0.8	19.0
M10	3.5/6.0	13.0	12.9	14.2	0.8	21.5
M12*	1.0/4.0	16.0	15.9	17.2	0.8	22.5

* This part (M12) is supplied with a smooth

⇒ STAINLESS STEEL A2

Tel: 01202 747217
sales@premfast.co.uk

PremFast Ltd

A2 Stainless Steel
Reduced Csk Half Hex Body Blind Rivet Nuts

Thread Size	Grip Range	Hole Dia	Body Dia	Head Dia	Head Thickness	Overall Length
M3	0.5/2.0	5.1	5.0	6.0	0.4	9.0
M3	2.0/3.2	5.1	5.0	6.0	0.4	9.5
M4	0.5/2.5	6.1	6.0	7.0	0.5	11.0
M4	2.5/4.0	6.1	6.0	7.0	0.5	12.5
M5	0.5/3.0	7.1	7.0	8.0	0.5	12.0
M5	3.0/4.5	7.1	7.0	8.0	0.5	13.5
M6	0.5/3.0	9.1	9.0	10.0	0.5	14.0
M6	3.0/5.0	9.1	9.0	10.0	0.5	16.0
M8	0.5/3.0	11.1	11.0	12.0	0.5	16.0
M8	3.0/5.0	11.1	11.0	12.0	0.5	18.5
M10	1.0/3.5	13.1	13.0	14.2	0.7	19.0

⇒ STAINLESS STEEL A2

Tel: 01202 747217
sales@premfast.co.uk

PremFast Ltd

A2 Stainless Steel
Flange Head Knurled Body Blind Rivet Nuts

Thread Size	Grip Range	Hole Dia	Body Dia	Head Dia	Head Thickness	Overall Length
M3	0.5/2.0	5.0	4.9	8.0	0.8	9.8
M4	0.5/2.5	6.0	5.9	9.0	1.0	12.0
M4	2.5/4.0	6.0	5.9	9.0	1.0	13.5
M5	0.5/3.0	7.0	6.9	10.0	1.0	13.0
M5	3.0/5.5	7.0	6.9	10.0	1.0	16.0
M6	0.5/3.0	9.0	8.9	12.0	1.5	15.5
M6	3.0/5.5	9.0	8.9	12.0	1.5	17.5
M8	0.5/3.0	11.0	10.9	15.0	1.5	17.5
M8	3.0/5.5	11.0	10.9	15.0	1.5	20.0
M10	1.0/3.5	13.0	12.9	17.0	2.0	21.0
M10	3.5/6.0	13.0	12.9	19.0	2.0	24.0
M12	1.0/4.0	16.0	15.9	23.0	2.0	25.0

⇒ STAINLESS STEEL A2

Tel: 01202 747217
sales@premfast.co.uk

PremFast Ltd

A2 Stainless Steel
Csk Knurled Body Blind Rivet Nuts

Thread Size	Grip Range	Hole Dia	Body Dia	Head Dia	Head Thickness	Overall Length
M3	1.5/3.5	5.0	4.9	7.5	1.5	11.5
M4	1.5/4.0	6.0	5.9	8.5	1.5	12.5
M5	1.5/4.5	7.06	6.9	9.5	1.5	13.5
M5	4.0/6.5	7.0	6.9	9.5	1.5	16.0
M6	1.5/4.5	9.0	8.9	11.5	1.5	16.0
M6	4.0/6.5	9.0	8.9	11.5	1.5	18.0
M8	1.5/4.5	11.0	10.9	13.5	1.5	18.0
M8	4.0/6.5	11.0	10.9	13.5	1.5	21.0
M10	2.0/4.5	13.0	12.9	15.5	1.8	21.0
M10	4.5/7.5	13.0	12.9	15.5	1.8	24.0
M12	2.0/4.5	16.0	15.9	19.0	2.0	24.5
M12	4.5/7.5	16.0	15.9	19.0	2.0	27.5

⇒ STAINLESS STEEL A2

Tel: 01202 747217
sales@premfast.co.uk

PremFast Ltd

A4 Stainless Steel
Reduced Csk Knurled Body Blind Rivet Nuts

Thread Size	Grip Range	Hole Dia	Body Dia	Head Dia	Head Thickness	Overall Length
M4	0.5/2.5	6.0	6.0	7.0	0.5	11.0
M5	0.5/3.0	7.0	7.0	8.0	0.5	12.0
M6	0.5/3.0	9.0	9.0	10.0	0.5	14.0
M8	0.5/3.0	11.0	11.0	12.0	0.5	16.0
M10	1.0/3.5	13.0	13.0	14.2	0.8	19.0

A4(316) grade stainless steel is the most corrosion resistant grade used for fastener with an increased percentage content of nickel and added molybdenum.

The result is better resistance to aggressive conditions, acids and chlorides found in marine, costal and some industrial applications.

⇒ STAINLESS STEEL A4 (316)

Tel: 01202 747217
sales@premfast.co.uk

PremFast Ltd

A4 Stainless Steel
Reduced Csk Head Half Hex Body Blind Rivet

Thread Size	Grip Range	Hole Dia	Body Dia	Head Dia	Head Thickness	Overall Length
M4	0.5/2.5	6.1	6.0	7.0	0.5	11.0
M5	0.5/3.0	7.1	7.0	8.0	0.5	12.0
M6	0.5/3.0	9.1	9.0	10.0	0.5	14.5
M8	0.5/3.0	11.1	11.0	12.0	0.5	16.0
M8	3.0/5.0	11.1	11.0	12.0	0.5	18.5
M10	1.0/3.5	13.1	13.0	14.2	0.7	19.0

A4(316) grade stainless steel is the most corrosion resistant grade used for fastener with an increased percentage content of nickel and added molybdenum.

The result is better resistance to aggressive conditions, acids and chlorides found in marine, costal and some industrial applications.

⇒ STAINLESS STEEL A4 (316)

The reduced countersunk head style offers near flush installation without any extra hole preparation. The half-hexagon body type completely eliminates any chance of the rivet nut rotating in the application.

Tel: 01202 747217
sales@premfast.co.uk

PremFast Ltd

A4 Stainless Steel
Flange Head Knurled Body Blind Rivet Nuts

Thread Size	Grip Range	Hole Dia	Body Dia	Head Dia	Head Thickness	Overall Length
M3	03.2.0	5.0	5.0	8.0	0.8	9.8
M4	0.3/2.5	6.0	6.0	9.0	1.0	12.0
M5	0.3/3.0	7.0	7.0	10.0	1.0	13.0
M6	0.5/3.0	9.0	9.0	12.0	1.5	15.5
M8	0.5/3.0	11.0	11.0	15.0	1.5	17.5
M10	1.0/3.5	13.0	13.0	17.0	2.0	21.0

A4(316) grade stainless steel is the most corrosion resistant grade used for fastener with an increased percentage content of nickel and added molybdenum.

The result is better resistance to aggressive conditions, acids and chlorides found in marine, costal and some industrial applications.

⇒ STAINLESS STEEL A4 (316)

The flange head style is suitable for load bearing applications as the larger diameter head reinforces the hole and increases the push-out resistance.

Tel: 01202 747217
sales@premfast.co.uk

PremFast Ltd

Rivet Nut Installation Equipment.
For Cordless Drills

Model PB-9600

Specifications:

⇒ M3,M4,M5 &M6 noses included.

⇒ Weight 0.25KG

⇒ 1/4”(6.35mm) Hex shank drive.

Professional attachment for setting: M3,M4,M5 & M6 Rivet Nuts.

Features:

⇒ Installs rivet nut using superior spin-pull method

⇒ Quick release mandrels for easy changeover.

⇒ Suitable for use with 12v-14.4v cordless drills.

Model PB-9010

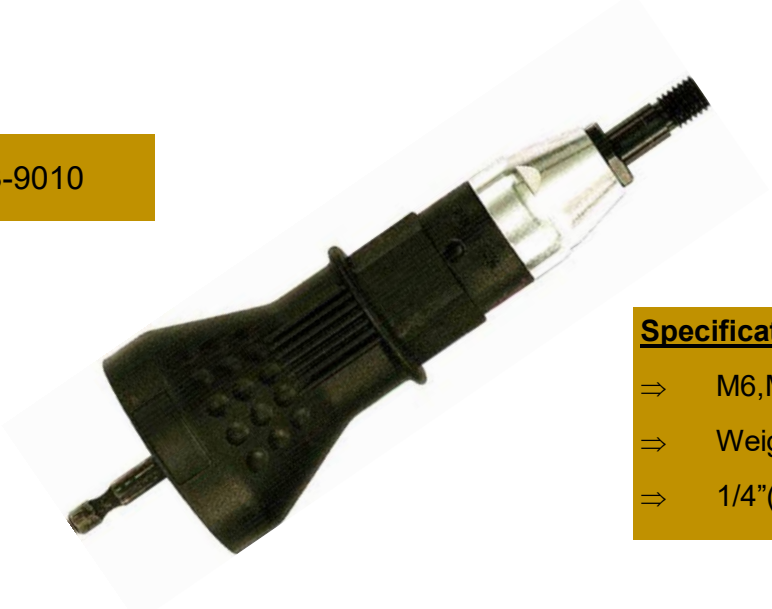

Specifications:

⇒ M6,M8, &M10 noses included.

⇒ Weight 0.46KG

⇒ 1/4”(6.35mm) Hex shank drive.

Professional attachment for setting: M6,M8 & M10 Rivet Nuts.

Features:

⇒ Installs rivet nut using superior spin-pull method

⇒ Quick release mandrels for easy changeover.

⇒ Suitable for use with 14v-18v cordless drills.

PremFast Ltd

Rivet Nut Installation Equipment.

Model PL12

M5-M12 Capacity

⇒ Powerful ratchet mechanism is ideal solution for setting lager size rivet nuts.

⇒ Ratchet style can be suitable for use in confined spaces.

⇒ M5,M6 & M8 rivet bolt adapters also included.