


- Dimensions
- Mechanical Properties
- Application Data

ISO 4762 / DIN 912 : Hexagon Socket Head Cap Screws

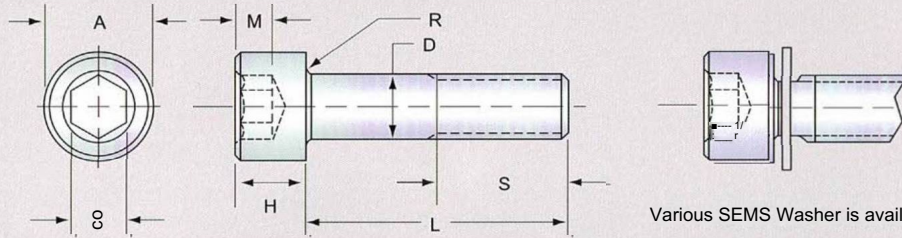

Various SEMS Washer is available.

Dimensions (mm)

Norm. Size	A		H		D		B		M	S	R	R. S. Torque (NM)	
	min.	max.	min.	max.	min.	max.	min.	max.	min.	min.	min.	12.9	10.9
M1.6	2.86	3.14	1.46	1.60	1.46	1.60	1.520	1.580	0.70	15	0.10	0.30	0.25
M2	3.62	3.98	1.86	2.00	1.86	2.00	1.520	1.580	1.00	16	0.10	0.63	0.50
M2.5	4.32	4.68	2.36	2.50	2.36	2.50	2.020	2.080	1.10	17	0.10	1.27	1.03
M3	5.32	5.68	2.86	3.00	2.86	3.00	2.520	2.580	1.30	18	0.10	2.20	1.83
M4	6.78	7.22	3.82	4.00	3.82	4.00	3.020	3.080	2.00	20	0.20	4.83	4.27
M5	8.28	8.72	4.82	5.00	4.82	5.00	4.020	4.095	2.50	22	0.20	10.0	8.64
M6	9.78	10.22	5.70	6.00	5.82	6.00	5.020	5.140	3.00	24	0.25	16.8	14.7
M8	12.73	13.27	7.64	8.00	7.78	8.00	6.020	6.140	4.00	28	0.40	41.0	35.6
M10	15.73	16.27	9.64	10.00	9.78	10.00	8.025	8.175	5.00	32	0.40	81.0	70.6
M12	17.73	18.27	11.57	12.00	11.73	12.00	10.025	10.175	6.00	36	0.60	142	120
M14	20.67	21.33	13.57	14.00	13.73	14.00	12.032	12.212	7.00	40	0.60	226	195
M16	23.67	24.33	15.57	16.00	15.73	16.00	14.032	14.212	8.00	44	0.60	350	305
M18	26.67	27.33	17.57	18.00	17.73	18.00	14.032	14.212	9.00	48	0.60	485	420
M20	29.67	30.33	19.48	20.00	19.67	20.00	17.050	17.230	10.00	52	0.80	685	596
M22	32.61	33.39	21.48	22.00	21.67	22.00	17.050	17.230	11.00	56	0.80	930	811
M24	35.61	36.39	23.48	24.00	23.67	24.00	19.065	19.275	12.00	60	0.80	1180	1031
M27	39.61	40.39	26.48	27.00	26.67	27.00	19.065	19.275	13.50	66	1.00	1730	1508
M30	44.61	45.39	29.48	30.00	29.67	30.00	22.065	22.275	15.50	72	1.00	2380	2048
M33	49.61	50.39	32.38	33.00	32.61	33.00	24.065	24.275	18.00	78	1.00	3262	2787
M36	53.54	54.46	35.38	36.00	35.61	36.00	27.065	27.275	19.00	84	1.00	4190	3580
M39	57.54	58.46	38.38	39.00	38.61	39.00	27.065	27.275	21.00	90	1.00	5420	4633

- Notes : 1. Above dimension A ( Head Diameter) for Knurled Heads. Dimensions for Plain Heads, please see Table 1.  
 2. Thread Class : 5g6g for property class 12.9 ; 6g for other property classes.  
 3. Length Tolerance : See Table 2.  
 4. R. S. Torque=Recommended Seating Torque.  
 5. Working Temperature : -50°C ~ + 300°C.

Mechanical Properties

Property Class	10.9	12.9
Hardness (HRC)	32-39	39-44
Tensile Strength ( Mpa )	1040 min.	1220 min.
Yield Strength at 0.2% Offset (Mpa)	940 min.	1100 min.
Elongation ( % )	9 min.	8 min.
Decarburization and Carburization (See Page 17 )	E = 2/3H1	E = 3/4H1

Table 2 Length Tolerance

Norm. Length	Tolerance	Norm. Length	Tolerance
L <sup>A</sup> 3	±0.20	80<L <sup>A</sup> 120	±0.70
3<LS6	±0.24	120<L <sup>A</sup> 180	±0.80
6<L <sup>A</sup> 10	± 0.29	180<L <sup>A</sup> 250	±0.90
10<L <sup>A</sup> 18	±0.35	250<L <sup>A</sup> 315	± 1.05
18<L <sup>A</sup> 30	±0.42	315<L <sup>A</sup> 400	± 1.15
30<L <sup>A</sup> 50	±0.50	L>400	±1.25
50<L <sup>A</sup> 80	±0.60		

Table 1 Head Diameter: A for Plain Heads

Nom. Size	Tolerance	Nom. Size	Tolerance	Nom. Size	Tolerance
M1.6	2.86- 3.00	M8	12.73-13.00	M22	32.61 - 33.00
M2	3.62- 3.80	M10	15.73-16.00	M24	35.61 -36.00
M2.5	4.32-4.50	M12	17.73- 18.00	M27	39.61 -40.00
M3*	5.32- 5.50	M14	20.67-21.00	M30	44.61 -45.00
M4	6.78- 7.00	M16	23.67 - 24.00	M33	49.61 - 50.00
M5	8.28- 8.50	M18	26.67 - 27.00	M36	53.54 - 54.00
M6	9.78-10.00	M20	29.67 - 30.00	M39	57.54 - 58.00

■ Typical Application Fixture

Socket head cap screws are designed to be used with the head protruding or counter bored. They should be used where high strength and ease of installation are required.

