







# size range

# advantages of the 360

# 360° timberfix

- less pre-drilling
- less splitting
- less effort
- faster

| DIAM  | LENGTH  | QUANTITIES |        |   | DRIVE | THREAD LENGTH | SHANK RIBS |
|-------|---------|------------|--------|---|-------|---------------|------------|
|       |         | INNER      | CARTON |   |       |               |            |
| 3.5mm | 15/16 * | 200        | 20000  |   | +     | FULL          | NO         |
|       | 20      | 200        | 20000  |   | +     | FULL          | NO         |
|       | 25      | 200        | 12000  |   | +     | FULL          | NO         |
|       | 30      | 200        | 10000  |   | +     | PART          | YES        |
|       | 35      | 200        | 8400   |   | +     | PART          | YES        |
|       | 40      | 200        | 5000   |   | +     | PART          | YES        |
| 4.0mm | 50      | 200        | 5000   |   | +     | PART          | YES        |
|       | 16      | 200        | 20000  |   | +     | FULL          | NO         |
|       | 20      | 200        | 12000  |   | +     | FULL          | NO         |
|       | 25      | 200        | 10000  |   | +     | FULL          | NO         |
|       | 30      | 200        | 10000  |   | +     | PART          | YES        |
|       | 35      | 200        | 5000   |   | +     | PART          | YES        |
|       | 40      | 200        | 5000   |   | +     | PART          | YES        |
|       | 45      | 200        | 5000   |   | +     | PART          | YES        |
|       | 50      | 200        | 5000   |   | +     | PART          | YES        |
|       | 60      | 200        | 4000   |   | +     | PART          | YES        |
| 4.5mm | 70      | 100        | 2500   |   | +     | PART          | YES        |
|       | 30      | 200        | 5000   |   | +     | PART          | YES        |
|       | 35      | 200        | 5000   |   | +     | PART          | YES        |
|       | 40      | 200        | 5000   |   | +     | PART          | YES        |
|       | 45      | 200        | 5000   |   | +     | PART          | YES        |
|       | 50      | 200        | 5000   |   | +     | PART          | YES        |
|       | 60      | 100        | 2500   |   | +     | PART          | YES        |
|       | 70      | 100        | 2500   |   | +     | PART          | YES        |
| 5.0mm | 80      | 100        | 2500   |   | +     | PART          | YES        |
|       | 30      | 200        | 5000   |   | +     | PART          | YES        |
|       | 40      | 200        | 5000   |   | +     | PART          | YES        |
|       | 50      | 200        | 4000   |   | +     | PART          | YES        |
|       | 60      | 100        | 2500   |   | +     | PART          | YES        |
|       | 70      | 100        | 2500   |   | +     | PART          | YES        |
|       | 80      | 100        | 2500   |   | +     | PART          | YES        |
|       | 90      | 100        | 2500   |   | +     | PART          | YES        |
|       | 100     | 100        | 2500   |   | +     | PART          | YES        |
|       | 120     | 100        | 2000   |   | +     | PART          | YES        |
| 6.0mm | 50      | 100        | 2500   |   | +     | PART          | YES        |
|       | 60      | 100        | 2500   |   | +     | PART          | YES        |
|       | 70      | 100        | 2500   |   | +     | PART          | YES        |
|       | 80      | 100        | 2000   |   | +     | PART          | YES        |
|       | 90      | 100        | 2000   |   | +     | PART          | YES        |
|       | 100     | 100        | 2000   |   | +     | PART          | YES        |
|       | 120     | 100        | 1000   |   | +     | PART          | YES        |
|       | 130     | 100        | 1000   |   | +     | PART          | YES        |
|       | 150     | 100        | 1000   |   | +     | PART          | YES        |
|       | 180     | 50         | 500    |   | +     | PART          | YES        |
| 200   | 50      | 500        |        | + | PART  | YES           |            |

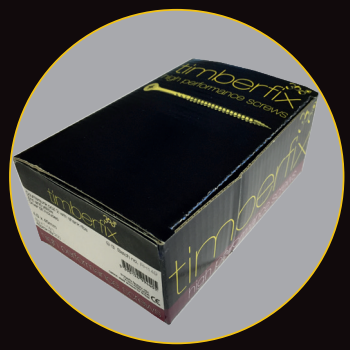

authorised distributor

**PremFast**  
PREMIER FASTENER SUPPLIES

[www.premfast.co.uk](http://www.premfast.co.uk)  
[sales@premfast.co.uk](mailto:sales@premfast.co.uk)  
01202 747217

Introducing the all new high performance multi purpose wood screw. The timberfix® 360 drives faster with less torque and a reduced chance of splitting the wood.

high performance screws

# application

Timberfix® 360 - One of the most versatile screws on the market today, suitable for both manmade boards and natural wood. Capable of driving into most hardwoods without the need for pre drilling.

## suitable materials :



- hard wood
- chipboard
- oak
- plywood
- soft wood
- OSB
- MDF board



# features

## countersunk head

Reinforced countersunk head handles torque and harder woods. Self countersinking ribs under the head are time saving and ensure a neat finish. Classic pozi or t-drive available

## shank ribs

These reduce the drive torque required during installation. Helps prevent the wood splitting, particularly useful on the longer lengths and larger diameters. Cleans the hole when securing two pieces of wood together preventing jacking.

## special thread geometry

The special thread design with advanced cutting edge combined with a next generation lubrication system ensures almost half the torque is required to drive in. Faster, with less effort. Zinc and yellow finish.

## cut point

The type 17 or "gash" point helps drive the screw through the tougher woods without pre-drilling.

# timberfix<sup>360</sup>

